
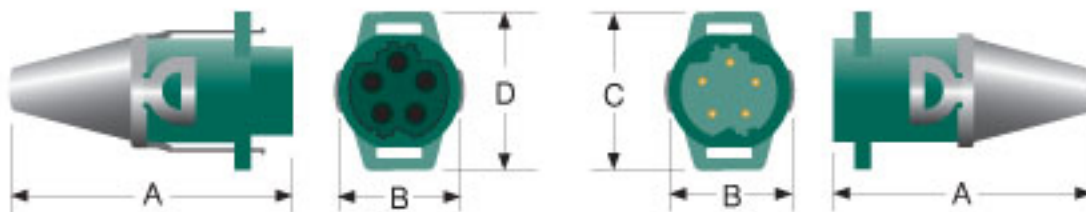


Features

- Application versatility
- Interfaces with all **ACLinx™** components
- Full 20-amp rating
- Single, dual and three circuit models
- #12 AWG copper conductors standard
- #10 AWG copper conductors optional
- 600V, 90° C insulation
- Dead front construction for safety
- Color coded connectors for easy voltage identification
- Keyed components ensure proper connection, function and safety
- Positive locking clips prevent accidental disconnection
- Approved for installation in air handling spaces other than ducts and plenums
- 

Dimensions



A	B	C	D
3.5"	1.25"	1.75"	2"
89mm	31.7mm	44.4mm	50.8mm

Product Ordering Key

1

Voltage
 1 = 120/208
 2 = 277/480
 4 = 480
 20 = 208
 24 = 240

E

Extender Cable

5

Number of Conductors
 3 = 2 wire with ground
 4 = 3 wire with ground
 5 = 4 wire with ground

10

Cable Length
 in feet

IG

Options
 See Below

Options

Suffix	Description
-2N	Dual Neutral
-IG	Isolated Ground
-10G	#10 AWG Copper Conductors

Connector Key Coding

Color	Voltage
Gray	277/480 and 480VAC
Brown	120/208, 208 and 240VAC
Purple	Dual Neutral 120/208VAC
Khaki	Dual Neutral 277/480VAC
Green	Isolated Ground

