
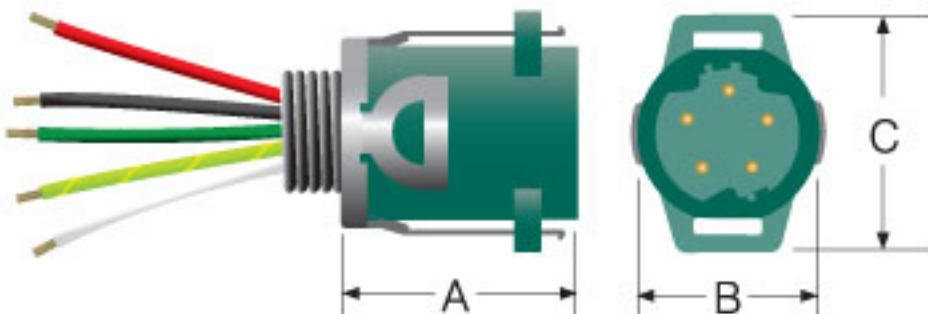


Features

- Easily installed
- Full 20-amp rating
- Single, dual and three circuit models
- #12 AWG copper conductors standard
- #10 AWG copper conductors optional
- 600V, 105° C insulation
- Color coded connectors for easy voltage identification
- Keyed components ensure proper connection, function and safety
- Positive locking clips prevent accidental disconnection
- Approved for installation in air handling spaces other than ducts and plenums
- 

Dimensions



A	B	C
1.75" (44.4mm)	1.375" (34.9mm)	2" (50.8mm)

Product Ordering Key

1

FS

5

IG

Voltage

1 = 120/208
2 = 277/480
4 = 480
20 = 208
24 = 240

In-Bound Power Connector

Number of Conductors
3 = 2 wire with ground
4 = 3 wire with ground
5 = 4 wire with ground

Options See Below

Options

Suffix	Description
-2N	Dual Neutral
-IG	Isolated Ground
-10G	#10 AWG Copper Conductors

Connector Key Coding

Color	Voltage
Gray	277/480 and 480VAC
Brown	120/208, 208 and 240VAC
Purple	Dual Neutral 120/208VAC
Khaki	Dual Neutral 277/480VAC
Green	Isolated Ground

