
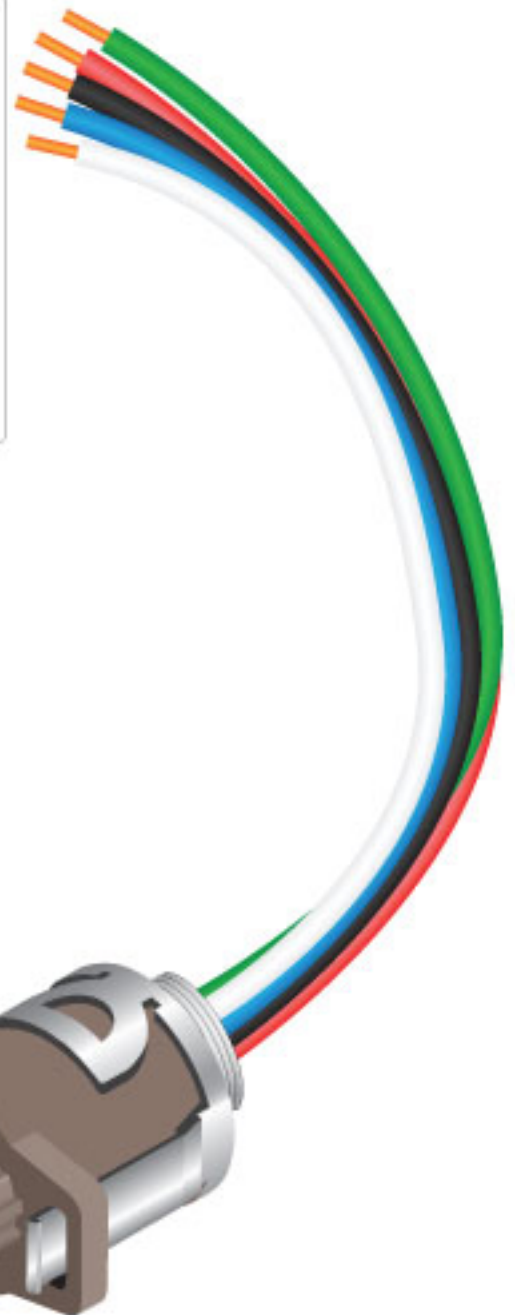
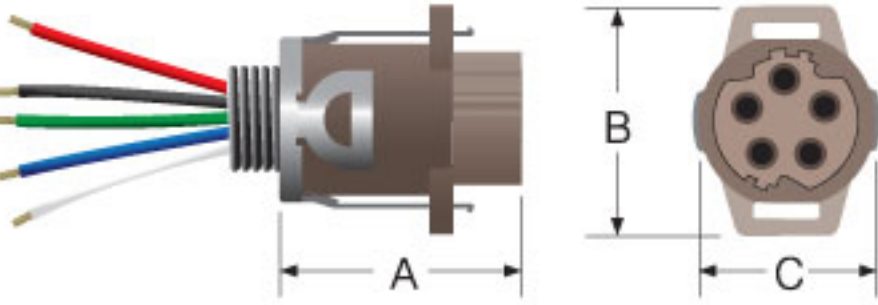


## Features

- Easily installed
- Full 20-amp rating
- Single, dual and three circuit models
- #12 AWG copper conductors standard
- #10 AWG copper conductors optional
- 600V, 105° C insulation
- Dead front construction for safety
- Color coded connectors for easy voltage identification
- Keyed components ensure proper connection, function and safety
- Positive locking clips prevent accidental disconnection
- Approved for installation in air handling spaces other than ducts and plenums
- 



## Dimensions



A	B	C
1.75" (44.4mm)	2.00" (50.8mm)	1.375" (34.9mm)

## Product Ordering Key

**1**      **D**      **5**      **2N**

Voltage  
 1 = 120/208  
 2 = 277/480  
 4 = 480  
 20 = 208  
 24 = 240

Out-Bound Power Connector

Number of Conductors  
 3 = 2 wire with ground  
 4 = 3 wire with ground  
 5 = 4 wire with ground

Options See Below



## Options

Suffix	Description
-2N	Dual Neutral
-IG	Isolated Ground
-10G	#10 AWG Copper Conductors

## Connector Key Coding

Color	Voltage
Gray	277/480 and 480VAC
Brown	120/208, 208 and 240VAC
Purple	Dual Neutral 120/208VAC
Khaki	Dual Neutral 277/480VAC
Green	Isolated Ground